DUETTO 6M AWNING

BEYDOUN STORE

What is an awning made of?

Description

Duetto is a self-standing awning system based on a single central rolling tube that provides shade and coverage on either side. Its maximum dimensions are 6 m in width by 3 m projection on each side, allowing it to provide up to 36 square metres of shade.
The system is supported by a sturdy structure with a MONOBLOC awning that makes it very adaptable and easy to set up and to adjust the arms.
It is an ideal awning for use in hotels, restaurants, social clubs, gardens, large terraces, solariums, golf clubs, etc.

Ideal for installation

- On terraces
- In gardens
- Solariums

Dimensions

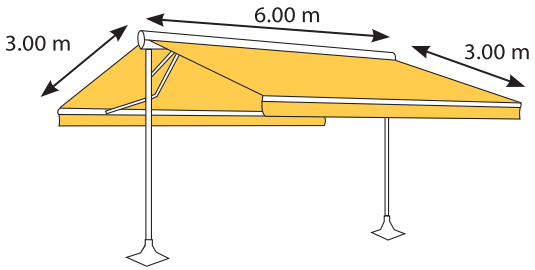

Mounting

- Surface
- Built-in

Operation

- Manual (with MR-5 gearbox)
- Motorised
- Automated

Finishes

- Lacquer in accordance with QUALICOAT standards
- A4 stainless steel screws and bolts

Technical specifications

Degrees of inclination



Types of foot

Square base



Built-in base



Surface base*



Dimensions (mm)

With cassette	Without cassette
	

Features:

- The Monobloc system is used for both awnings on the structure.
- Very stable structure thanks to reinforced angle joints, which make it more reliable and durable, even in the largest sizes.
- Can be left affixed to the floor year round, or optionally dismounted depending on the time of year.
- Its anti-wind blocking system helps to keep the arms from moving upwards in the event of convection currents.
- Very versatile finish, with or without a fabric protection system.

BEYDOUN STORE
Glazing System-Solar Protection

DUETTO

El nuevo toldo con estructura independiente, para colocación a dos aguas de brazos articulados.

- Medidas máximas:
  6000 x 30003000+mm.
- Grados de inclinación:
  De 0º hasta 20º
- Simetría idéntica en ambos lados, tanto en la inclinación como en la salida.
- Un solo tubo de enrolle
- Opción de perfil TEXPRO para protección de lona

Soportes para el tubo de enrolle anclados en el extremo del perfil estructural, y sujetos mediante presión interna.
Dos versiones:

- Sin perfil adaptación para perfil texpro.
  El tubo de enrolle con la lona queda visto
- Con adaptación para perfil texpro.
  Permite la sujeción de dicho perfil, quedando el enrolle de la lona oculto

Estructura creada con tubo de hierro galvanizado y lacado, de medidas 80 x 40 x 2

DUETTO

Soporte de brazos anclado en la barra estructural con sistema monobloc, lo que permite la colocación de los brazos en el punto deseado.

Tornillo de nivelación de la inclinación del vástago, para poder regular la altura de codos.

Ajuste del grado de inclinación mediante tornillo delantero, y sistema de bloqueo posterior, para evitar el alzado de los brazos por efecto del viento

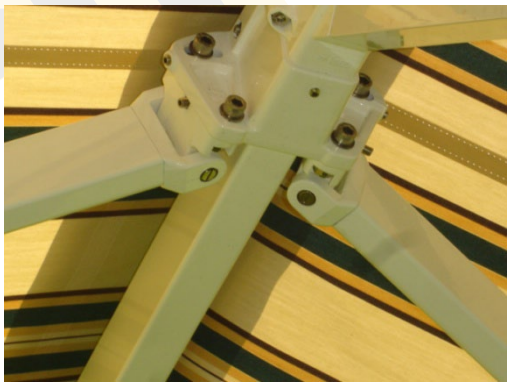

Todo el sistema de ensamblaje se efectúa mediante piezas que embridan a la estructura, permitiendo la colocación de refuerzos en distintos sentidos.





BEYDOUN STORE
Glazing System-Solar Protection

Beyrouth - Basta El Tahta
Imm. Beydoun - Tel: (01) 666 660
Fax : +961 1 659 200
B.P. :11-7238 Beyrouth - Liban
Sales@beydounstore.com.lb
www.beydounstore.com.lb